


MKA-10110




- 常开型 1 Form A
- 体积微小, 玻璃长度: 10mm. 直径: 1.8mm

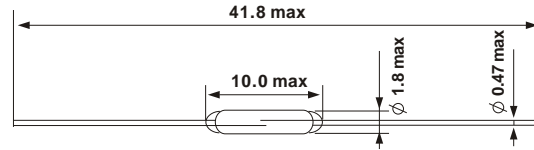


电气特性	Contact Form	触点形式	1A(SPST-NO)
	Contact Material	触点材质	Ru
	Contact Rating	触点负载	10W
	Max. Switching Voltage	最大开关电压	100 VDC / VAC
	Max. Switching Current	最大开关电流	0.5 A
	Contact Resistance (at initial value)	接触电阻 (初始值)	100 mΩ
	Pull In Value (AT)	启动值	10-35
	Drop Out Value (AT)	释放值	4
工作特性	Operation Time	动作时间	0.5 mSec.(Max.)
	Release Time	释放时间	0.3 mSec.(Max.)
	Breakdown Voltage	耐高压	150 VDC
	Contact Capacitance	触点电容	0.5 pF
	Insulation Resistance	绝缘电阻	10 ⁹ Ω
	Resonant Frequency	谐振频率	5 kHz
	Operation Temperature	工作温度范围	-60℃~+125℃
	Operation Frequency	最高工作频率	400 Hz
	Electrical Life	电气寿命	5×10 ⁶ (50mV, 5μA) 5×10 ⁶ (5V, 10mA) 1×10 ⁵ (24V, 250mA)
	Test Coil	测试线圈	5000 T 580 Ω
Leads	引线脚	Gold-Plated 镀金	

Electrical Characteristics:


(1) Drop-out vs. Pull-in

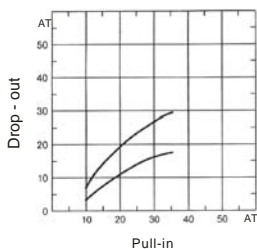

(2) Contact resistance

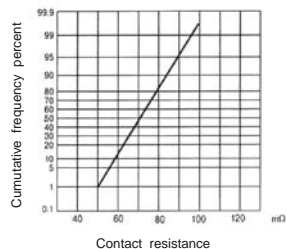

(3) Breakdown voltage

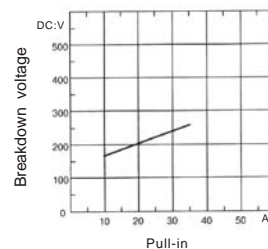

(4) Insulation resistance

