



HAMLIN®


BENEFITS

- Hermetically sealed switch
- Contacts have no effect on their external environment
- Low space requirement
- Zero operating power required
- Fit and forget durability

APPLICATIONS

- Reed Relays
- Security
- Limit Switching
- Telecoms line switching
- Office equipment
- Light inductive loads
- European mains Voltage Switching

HA15-2

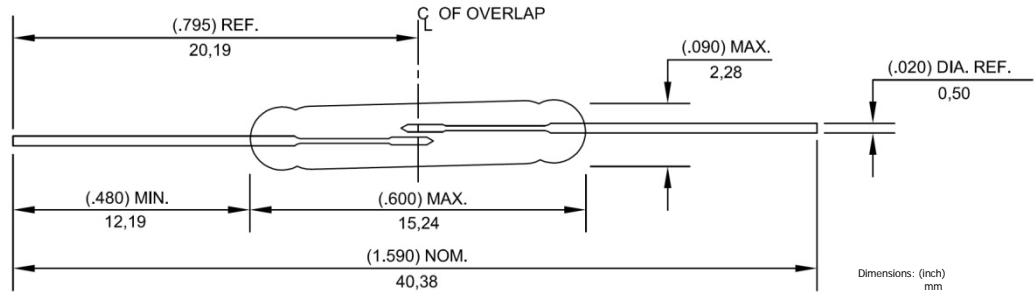

Switch type	HA15-2		
Contact Form	A (SPST)		
ELECTRICAL RATINGS	Sensitivity (5)	17-23	22+
Contact Rating (2)	Watts - max	10	10
Voltage	Switching	VAC rms max / VDC	265 / 200
	Breakdown	VDC - min	400
Current	Switching	A - max (AC/DC)	0.3 / 0.4
	Carry	A - max (DC)	1.4
Resistance	Contact, Initial	Ω - max	0.100
	Insulation	Ω - min	10 ¹⁰
Capacitance	Contact	pF - typ	0.2
Temperature	Operating	°C	-20 to +125
	Storage (6)	°C	-65 to +125
OPERATING CHARACTERISTICS			
Operate time (3)		ms - max	0.6
Release Time (3)		ms - max	0.2
Shock	11ms 1/2 sine wave	G - max	100
Vibration	50-2000 Hertz	G - max	30
Resonant Frequency		Hz - typ	4000
MAGNETIC CHARACTERISTICS			
Pull-in Range (4)		Ampere Turns	17-23, 22-28, 27-33
Test Coil			L4989


Notes

- 1) For details on electrical specifications contact Hamlin
- 2) Contact rating-Product of the switching voltage and current should never exceed the wattage rating. Contact Hamlin for additional load/life information
- 3) Operate (inc. bounce / Release Time-per Eia/NARM RS421A, diode suppressed coil.
- 4) Pull in Range-Contact Hamlin for tolerances within this range.
- 5) Rating Sensitivity, The value at which contact ratings and operating characteristics are determined. Derating may be required for lower values
- 6) Storage Temperature-Long time exposure at elevated temperature may degrade solderability of the leads.




HA15-2

PI vs DO

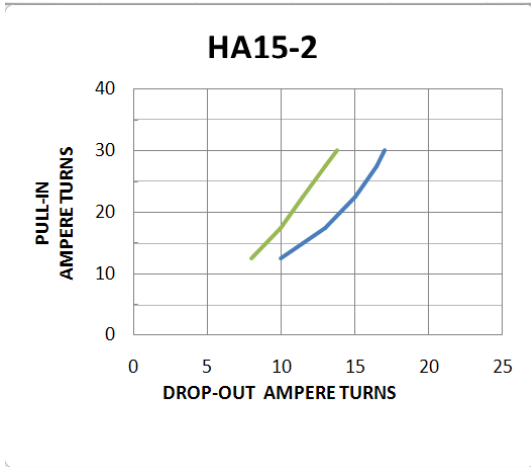

BREAKDOWN VOLTAGE

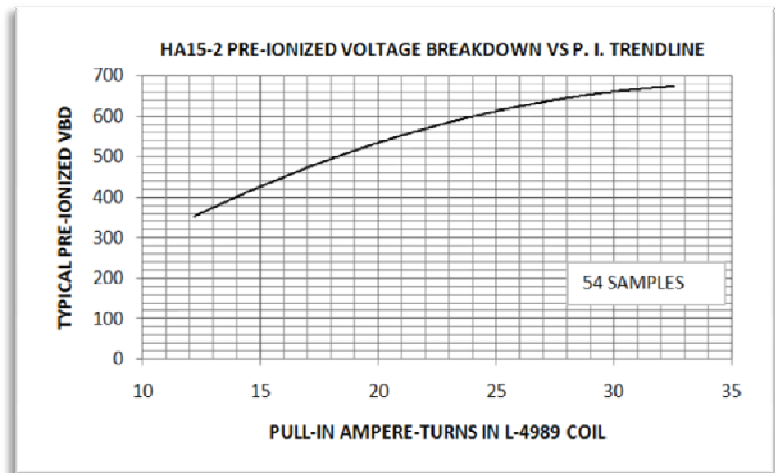

TYPICAL LIFE TEST RESULTS

Voltage	10 VDC	24VDC	25VDC	120VAC Relay	250VAC
Current	1 mA	10 mA	250mA	20 mA	10 mA
Pull-In AT	20	20	20	15	20
Life	1×10^8	1×10^7	50×10^6	2×10^6	5×10^6

Life test notes:-
 Each operation monitored for failure to open or close.
 15-20 samples each test.
 End of life criteria: >10% failure.
 Results may vary with such factors as pull-in, circuit reactance or drive method.