

## MDCG-4 Features and Benefits



### Features

- Sub-miniature normally open switch with 15.24mm x 2.28mm (0.6" x 0.090") glass envelope
- Capable of switching up to 200Vdc
- Maximum contact rating 10 Watts
- 10<sup>10</sup> Ohms insulation resistance
- Available sensitivity range 12-38 AT


### Benefits

- Hermetically sealed switch contacts are not effected by and have no effect on their external environment
- Low, stable contact resistance
- Low space requirement
- Zero operating power required for contact closure
- Fit and forget durability
- Well suited to signal switching applications

### Applications

- Reed relays
- Security
- Limit switching
- Telecoms
- Office equipment

## DIMENSIONS (in) mm

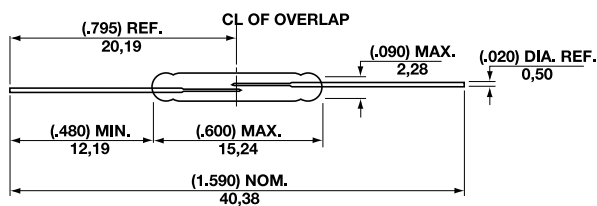

<b>Switch Type</b>	<b>MDCG-4</b>
Contact Form	<b>A</b>
Underwriters Laboratories Recognised, File E47258 (see note 1)	

### ELECTRICAL RATINGS

Contact Rating (2)		Watt - max.	10
Voltage	Switching	Vdc - max.	200
	Breakdown	Vdc - min.	250
Current	Switching	A - max.	0.5
	Carry	A - max.	1.2
Resistance	Contact, Initial	Ω - max.	0.100
	Insulation	Ω - min.	10 <sup>10</sup>
Capacitance	Contact	pF - typ.	0.2
Temperature	Operating	°C	-40 to +125
	Storage (6)	°C	-65 to +125

### OPERATING CHARACTERISTICS

Operate Time (3)		ms - max.	0.6
Release Time (3)		ms - max.	0.2
Shock	11ms ½ sine wave	G - max.	100
Vibration	50-2000 Hertz	G - max.	30
Resonant Frequency		Hz - typ.	3900

### MAGNETIC CHARACTERISTICS

Pull-In Range (4)		Ampere Turns	12-38
Rating Sensitivity (5)		Ampere Turns	20
Test Coil			L4989

- Notes
- 1) For details on electrical specifications, contact Hamlin.
  - 2) Contact rating-Product of the switching voltage and current should never exceed the wattage rating. Contact Hamlin for additional load/life information.
  - 3) Operate/Release Time-per EIA/NARM RS421A, diode suppressed coil.
  - 4) Pull in Range-Contact Hamlin for tolerances available within this range.
  - 5) Rating Sensitivity-The value at which contact ratings and operating characteristics are determined. Derating may be required below this value.
  - 6) Storage Temperature-Long time exposure at elevated temperature may degrade solderability of the leads.

**USA** Tel: +1 920 648 3000 • Fax: +1 920 648 3001 • Email: sales@hamlin.com  
**UK** Tel: +44 (0)1379 649700 • Fax: +44 (0)1379 649702 • Email: uksales@breedtech.com  
**Germany** Tel: +49 (0) 6181 953660 • Fax: +49 (0) 6181 953666 • Email: hamlin-electronics.de@breedtech.com  
**France** Tel: +33 1 46 87 02 02 • Fax: +33 1 46 86 67 86 • Email: hamectrol@hamectrol.fr